




MAGNETIC INSERT SPARK PLUG SOCKETS



| ITEM NO. | DRIVE | SIZE | D | L | g | CTNS Q'TY |
|----------|---------|------------|----|----|-----|-----------|
| RA351 | 3/8"DR. | 5/8"(16) | 22 | 65 | 100 | 150 |
| RA352 | 3/8"DR. | 3/4"(19) | 26 | 65 | 150 | 100 |
| RA353 | 3/8"DR. | 13/16"(21) | 28 | 65 | 180 | 100 |
| RA451 | 1/2"DR. | 5/8"(16) | 22 | 67 | 100 | 150 |
| RA452 | 1/2"DR. | 3/4"(19) | 26 | 67 | 150 | 100 |
| RA453 | 1/2"DR. | 13/16"(21) | 28 | 67 | 180 | 100 |

RUBBER-INSERT SPARK PLUG SOCKETS



| ITEM NO. | DRIVE | SIZE | D | L | g | CTNS Q'TY |
|----------|---------|------------|----|----|-----|-----------|
| A345 | 3/8"DR. | 5/8"(16) | 22 | 65 | 100 | 200 |
| A346 | 3/8"DR. | 3/4"(19) | 26 | 65 | 150 | 150 |
| A347 | 3/8"DR. | 13/16"(21) | 28 | 65 | 180 | 100 |
| A445 | 1/2"DR. | 5/8"(16) | 22 | 67 | 100 | 200 |
| A446 | 1/2"DR. | 3/4"(19) | 26 | 67 | 150 | 150 |
| A447 | 1/2"DR. | 13/16"(21) | 28 | 67 | 180 | 100 |

DISC BRAKE CALIPER SOCKETS




| ITEM NO. | DRIVE | SIZE | D | L | g | CTNS Q'TY |
|----------|---------|-------|----|----|----|-----------|
| A309 | 3/8"DR. | 5/16" | 18 | 30 | 25 | 100 |
| A310 | 3/8"DR. | 3/8" | 18 | 30 | 28 | 50 |

OIL SENDING UNIT




| ITEM NO. | DRIVE | SIZE | D | L | g | CTNS Q'TY |
|----------|---------|---------|----|----|-----|-----------|
| A603 | 3/8"DR. | 1-1/16" | 38 | 50 | 220 | 100 |

INDEX WRENCH




| ITEM NO. | SIZE | A | D | L | g | CTNS Q'TY |
|----------|------|----|------|-----|------|-----------|
| GT11 | 12 | 60 | 10.5 | 169 | 16.3 | 120 |

PLAM RATCHETS



| ITEM NO. | DRIVE | D | L | g | CTNS Q'TY |
|----------|---------------|------|-----|----|-----------|
| RA3604 | 3/8DR.x1/4DR. | 10.5 | 169 | 25 | 500 |
| RA3605 | 3/8DR. | 44.8 | 29 | 90 | 200 |

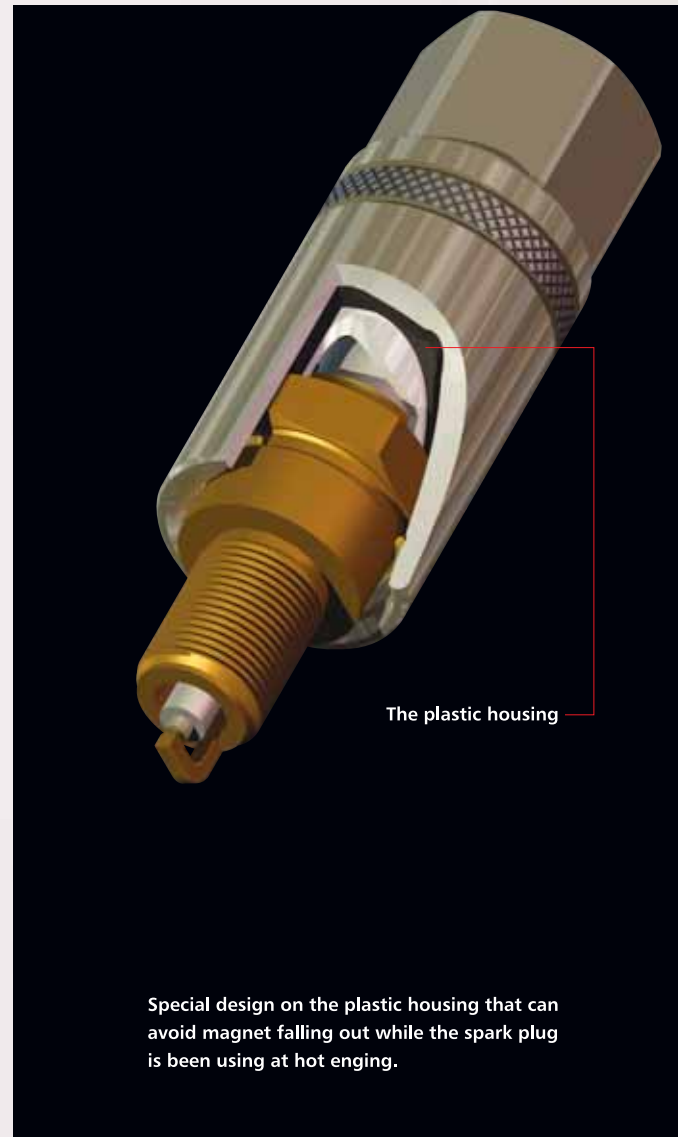

Special design on the plastic housing that can avoid magnet falling out while the spark plug is been using at hot enging.